

GIRAFE ANCHOR SERIES

INDIA'S TALLEST
FALL PROTECTION
ANCHORS

CWG .ORG .GOW



01

Girafe On Wheels (GOW)

GIRAFE ANCHOR SERIES

- On wheels portable Anchoring device
 - Variants with Manual, Gasoline and EV drive
 - Adjustable height via hydraulic system
 - Complete foldable system via double hydraulic pack
 - Battery backup available
 - Suitable for both indoor and outdoor application
-
- Compliant with EN 795: 2012 Type C and D
CEN/TS 16415:2013

Industries



Aerospace



Construction



Oil and Gas/Mining



Chemical and Pharma



Railways



Power Generation
and Distribution



Metals and Cement








Fire Rescue and
Disaster Management



GOW 6H2.2R SPECIFICATION ...

- Height:** 4-6m Hydraulically adjustable.
- Reach:** 2.2m
- Capacity:** 2.7-3 ton
- Wheels:** Solid rubber.
- Steering system:** Skid steering (wired/bluetooth remote control)
- Drive Specs:** Rear axle motor driven
Vehicles speed :3-5km/h
Gradeability: 2 - 3
- Battery:** 24V 280Ah

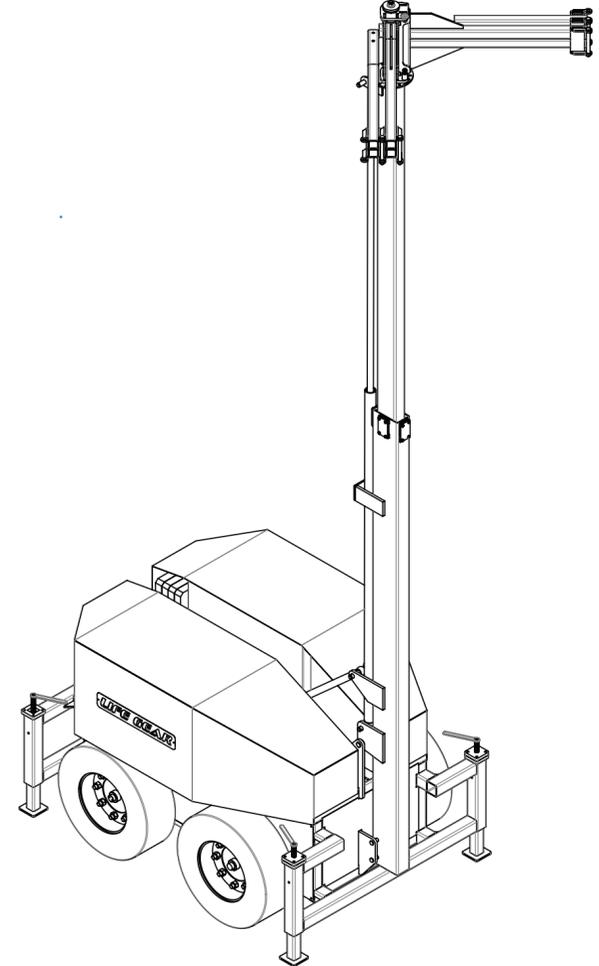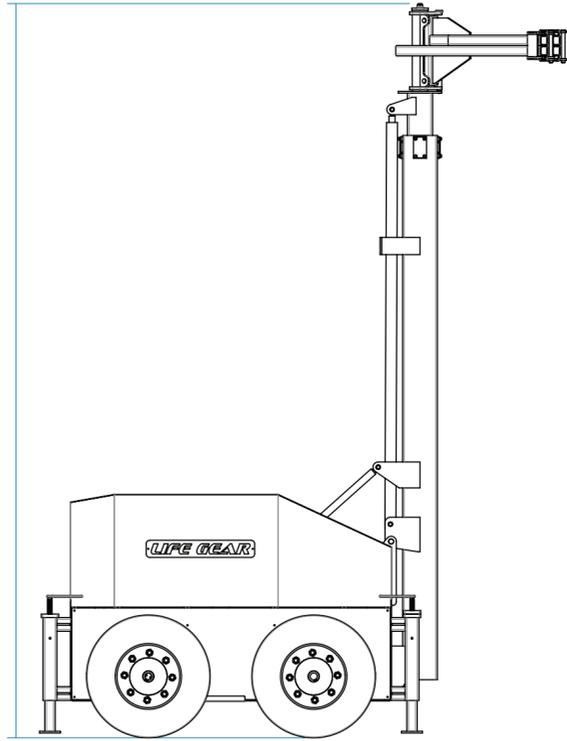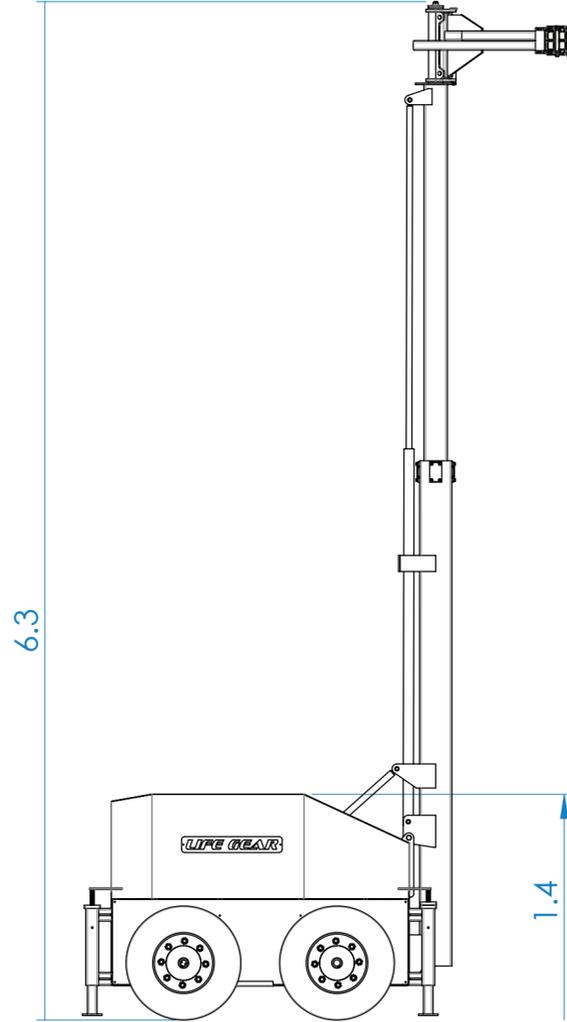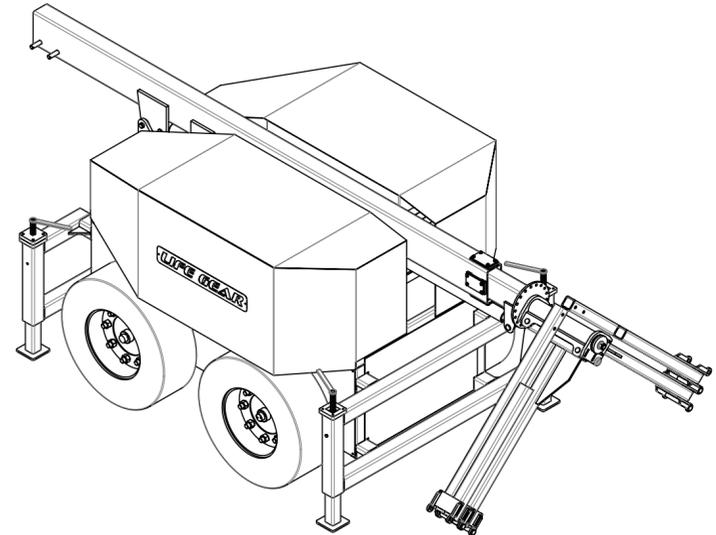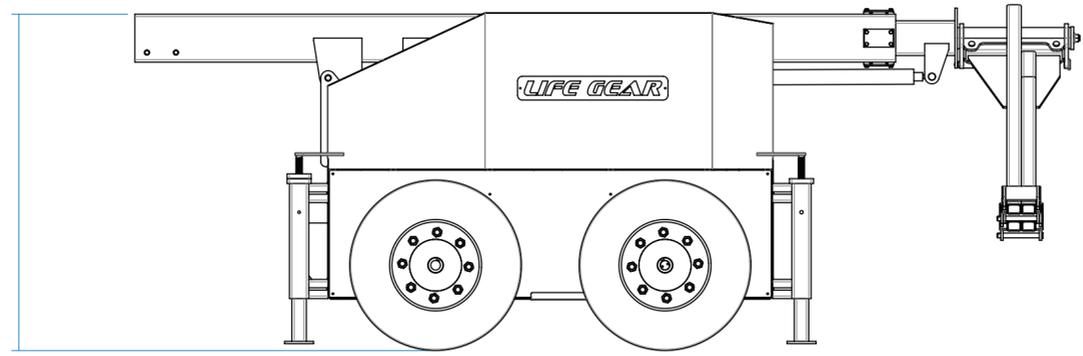

Counter Weight Girafe (CWG)

GIRAFE ANCHOR SERIES

- ❑ Available models - 6H2R, 7H3R, 9H3R.
 - ❑ Portable Counter weight anchors point
 - ❑ Hydraulically operated Height adjustment
 - ❑ Battery backup operation
 - ❑ Direct AC drive available
-
- ❑ Compliant with EN 795: 2012 Type C and D
CEN/TS 16415:2013

Industries



Aerospace



Construction



Oil and Gas/Mining



Chemical and Pharma



Railways

Power Generation
and Distribution

Metals and Cement





Fire Rescue and
Disaster Management

CWG 6H3RH SPECIFICATION ...

Height: 6m, 7m, 9m.
Reach: 2m, 2.5m, 3m
Capacity: 2 people
 (max weight 140 kgs per person.)

Adjustable movement: 360° swivel arm

Height adjustment: Hydraulically operated

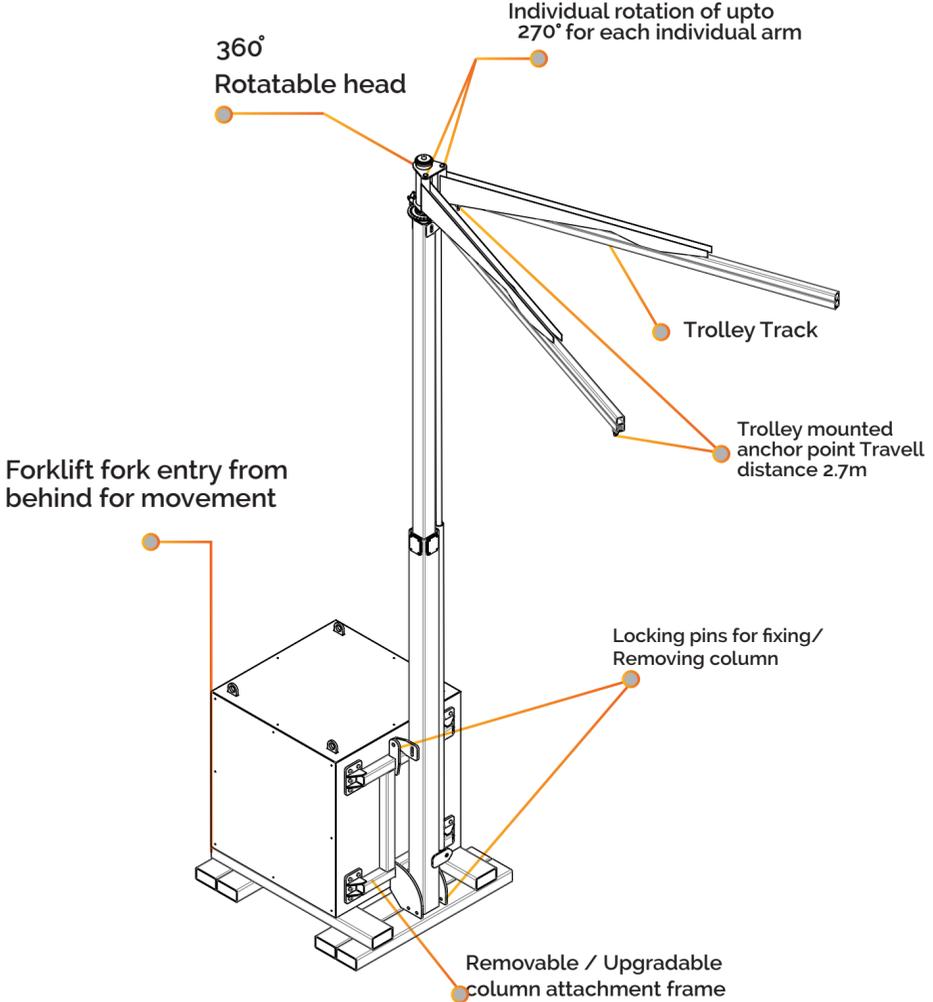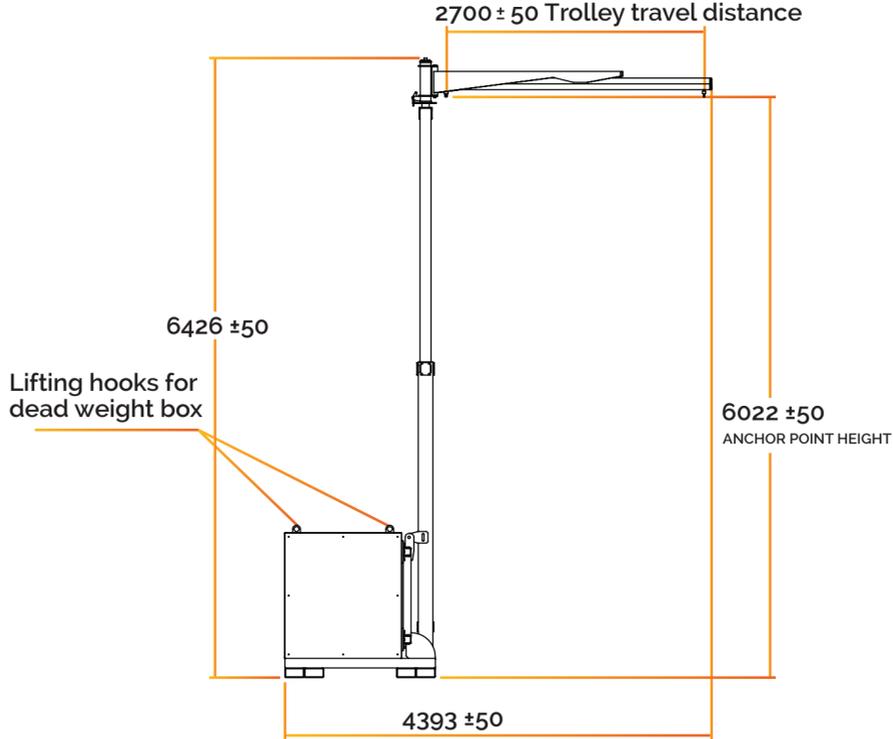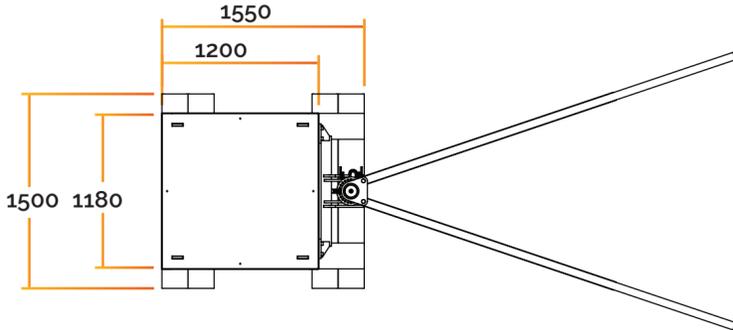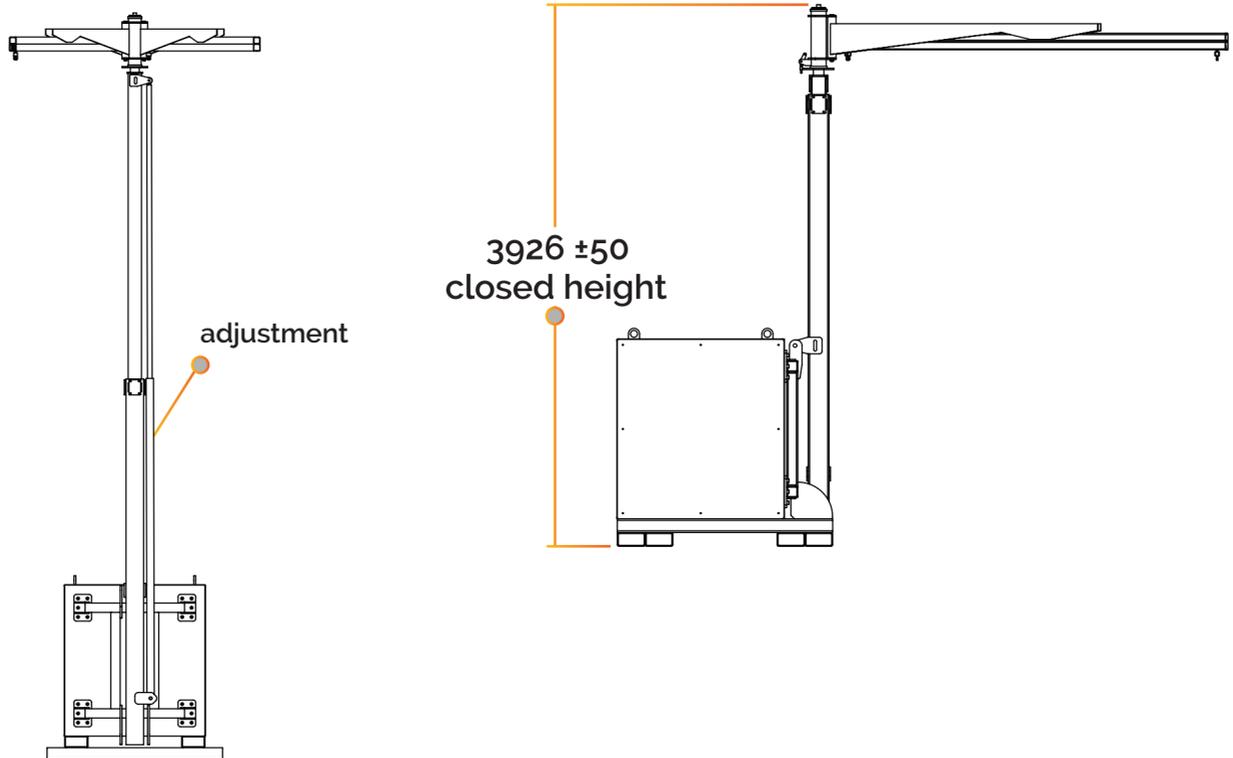

03

OUT RIG GIRAFE (ORG)

- ❑ Patented design with an Out-rig anchoring system.
 - ❑ ORG can be erected on existing concrete within minutes.
 - ❑ Best used for loading unloading under EOT crane movement.
 - ❑ Occupies very little bottom space for anchoring.
 - ❑ Easy to handle, easy to maintain.
 - ❑ Lock pins to lock the system at any desired angle.
 - ❑ Does not need foundation for erection, can be erected via simple anchor fasteners on its patented out rig base.
-
- ❑ Compliant with
EN 795: 2012 Type C and D
CEN/TS 16415:2013

Industries



Aerospace



Construction



Oil and Gas/Mining



Chemical and Pharma



Railways



Power Generation
and Distribution



Metals and Cement



Fire Rescue and
Disaster Management



ORG 6H2R SPECIFICATIONS ...

Height: 4m, 5m 6m 7m.
Reach: 2m, 3m, 4m
Capacity: 1 person with capability of additional one for rescue.

Adjustable movement: Attach track trolley system for full reach movement. 360° Rotation





Customer Support



Neethu Kaimal
Saafiya Shaikh
Sachin Aggarwal



Contact Us

+91- 7506862903
+91- 7506862950
+91- 8879575706



Email

client.service1@lifegear.in
client.service3@lifegear.in
sachin@lifegear.in



Parinee-i - 608, 6th floor,

7/A,Shah Industrial estate, off link rd, Behind Yashraj Studio, Andheri West, Mumbai 400053